



Apparecchio da parete predisposto per lampada a fluorescenza T5 da 24W ad emissione indiretta con effetto decorativo di luce frontale grazie all'apertura verticale presente nel corpo. Composto da una struttura in estrusione di alluminio anodizzato oppure verniciato a polvere epossipoliestere stabilizzata ai raggi UV, da un riflettore in alluminio superpuro 99,9% e da uno schermo in policarbonato opalino resistente al glow-wire test a 850°C.

Wall mount fixture predisposed for fluorescent 24W T5 bulbs providing indirect lighting for a decorative frontal light effect thanks to the slit in the body. It is composed of a structure in extruded aluminium, available anodized or painted with epoxy polyester powder stabilized for UV rays with a reflector in super pure 99.9% aluminium and with a guard in opalescent polycarbonate that is resistant in glow-wire testing to 850°C.

POLE


2107



T5

24W

G5

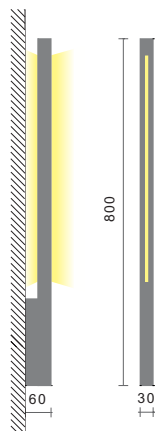

CE IP20

Alimentazione elettronica inclusa.
Electronic ballast included.

Bidiffusione.
Direct indirect light.

09 Bianco avorio opaco RAL 9010
White ivory matt like RAL 9010

20 Anodizzato naturale
Natural anodised



2107 T5
24W, G5